



CRY3502

1/2" IEPE Microphone Preamplifier with SMB Connector and TEDS, Very Short

Features

- **Key Specifications**

Frequency Range	0.6 Hz to 100 kHz (± 0.2 dB)
Input Impedance	$> 15\text{ G}\Omega/0.4\text{pF}$
Output Impedance	$< 35\Omega$

- **Applications**

Coupled cavity measurement
For use with prepolarized condenser microphones
Measurements where space is limited

Introduction

The CRY3502 is a general purpose measurement microphone preamplifier that can be used with all prepolarized condenser microphones.

The CRY3502 converts high input impedance to low output impedance, allowing longer extension cords to be used; The advantage is that the background noise is low, and it will hardly cause load to the microphone; Support TEDS function, reduce test time; The compact design enables measurement in space-constrained environments.

Highlights

- **What is IEPE?**

IEPE is a generic name for CRY SOUND products which operate on a constant current power supply. IEPE products give output signals in the form of voltage modulation on the power supply line. One of the advantages of this is that you can use inexpensive coaxial cables.

- **Compatibility**

The CRY3502 IEPE preamplifier is compatible with CRY SOUND prepolarized measurement microphones and can be used together with data acquisition hardware that supports IEPE microphones, such as the CRY6151B electroacoustic analyzer.

- **TEDS**

CRY3502 supports the Transducer Electronic Data Sheet (TEDS) conforming to the IEEE 1451.4 V1.0 standard. It is capable of being compatible with smart sensor technology to facilitate the integration and automated management of sensor information.

- **Calibration**

Each CRY SOUND preamplifier is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.

- **Quality & Warranty**

All CRY SOUND preamplifiers are made of stainless steel with good corrosion resistance and robustness, suitable for long-term storage.

CRY SOUND preamplifiers are supported by a 10-year warranty—offering one of the best service guarantee in the world.

Technical Specifications

Specifications

Frequency Response	0.6 Hz to 100 kHz (± 0.2 dB)
Input Impedance	>15 G Ω /0.4pF
Output Impedance	<35 Ω
Attenuation	-0.4 dB
Distortion (THD) at 1Vout	-80dB @1kHz (0.01%) -80dB @10kHz (0.01%)
Phase Linearity (re. 1kHz)	1 kHz to 10 kHz $<\pm 1^\circ$ 100 Hz to 20 kHz $<-3^\circ, +10^\circ$
Power Supply	IEPE(2 mA to 20 mA , Typical: 4 mA)
Max Output Voltage	>9.0 Vp
Noise (A-weighting)	<3 μ Vrms
Noise (linear 20 Hz to 20kHz)	<7 μ Vrms
DC Bias Voltage	12 V $\pm$ 2 V
Output Slew rate	7 V/ μ s
Connector Type	SMB
Temperature	-30°C to +70°C(86°F to 158°F)
Thread Interface Diameter	11.7 mm-60 UNS

Dimensions

Height	29.2mm (1.15")
Diameter	12.7mm (0.5")

Drawings(mm)[inch]

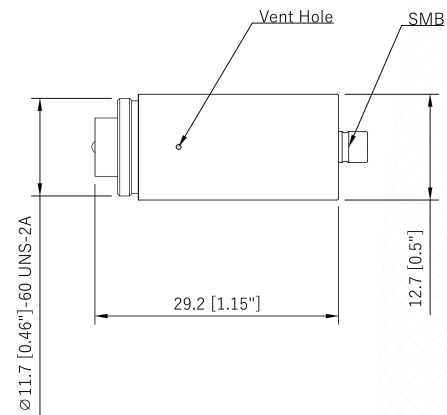


Fig.1 CRY3502 preamplifier Drawings

Ordering Information

Optional Accessories

Microphone Cartridges	1" Prepolarized Microphone 1/2" Prepolarized Microphone 1/4" Prepolarized Microphone
Adapter	TA0501 1/2" to 1" Adapter Ring TA0503 1/2" to 1/4" Adapter Ring
Electroacoustic Analyzer	CRY6151B Electroacoustic Analyzer
Power Supply	CRY575 Three-Channel Microphone Power Supply
Cable	SMB to BNC Cable /1.5m SMB to BNC Cable /0.8m SMB to BNC Cable /2.0m SMB to BNC Cable /0.6m

Related Products

CRY3501	1/2" IEPE microphone preamplifier with BNC connector and TEDS
CRY3503	1/2" IEPE microphone preamplifier with Microdot connector and TEDS, very short
CRY3521	1/2" IEPE microphone preamplifier with BNC connector, base-type
CRY3541	1/4" IEPE microphone preamplifier with SMB connector and TEDS
CRY3543	1/4" IEPE microphone preamplifier with Microdot connector and TEDS