



CRY438

1 Axis, 10 mV/g, High-G, IEPE Accelerometer, Top Connector

Features

- Key Specifications**

Sensitivity	10 mV/g
Frequency Response	1 Hz to 10 kHz (±1 dB)
Measuring Range	±500 g pk
- Applications**
 - Universal measurements
 - Modal analysis measurements.
 - Industrial vibration measurements

Introduction

CRY438 is a uniaxial acceleration sensor. The output mode is top M5, and it is installed on an object through an M5 bolt.

CRY438 can be used to measure tiny motions in laboratories and scientific research. It can also be used to monitor the vibration status of industrial equipment online. It can be equipped with armored shielded cables for measuring vibration parameters such as acceleration, velocity, and displacement in strong interference environments such as industry and power.

Highlights

- Applications of High-G Accelerometer**

High-g accelerometers are used to measure extreme acceleration changes, such as in collision and impact testing, aircraft and car acceleration, ballistic testing, and more. They can capture these huge acceleration changes and provide reliable data support.
- Compatibility**

The IEPE accelerometer is a PE charge accelerometer with an integrated preamplifier with an output signal in the form of a low-impedance voltage output that can be matched to a common coaxial cable. IEPE is a universal constant current source power supply technology used on sensors. Each manufacturer has different names, such as ICP, CCP, etc.
- Calibration**



Each CRY SOUND accelerometer is calibrated at the factory using traceable calibration equipment. Calibration certificates are provided with each unit. CRY SOUND recommends recalibration at least once a year.
- Quality & Warranty**

All CRY SOUND accelerometers are made of stainless steel with good corrosion resistance and robustness, suitable for long-term storage.

CRY SOUND preamplifiers are supported by a 1-year warranty—offering one of the best service guarantee in the world.

Technical Specifications

Dynamic Characteristics	
Sensitivity	10 mV/g (160Hz)
Frequency Response	1 Hz to 10 kHz (±1 dB) 0.6 Hz to 20 kH(±3 dB)
Measuring Range (Peak)	±500 g pk
Transverse Sensitivity	<5%
Electrical Characteristics	
Output Impedance	<100 Ω
Excitation Voltage	18 VDC to 28 VDC
Full Scale Output (Peak)	±5 V
Constant Current	2 mA to 10mA
Noise	<50 uV
Bias Voltage	9 V to 12 V
Environmental Characteristics	
Max Shock Protection	±3000 g
Operating Temperature	-40 °C to +120 °C
Physical Characteristics	
Connector Type	Top M5
Mounting Bolt	M5
Sensing Structure	Shear Mode
Case Materials	304 Stainless Steel
Sensing Element	PZT-5
Weight	9.5 g

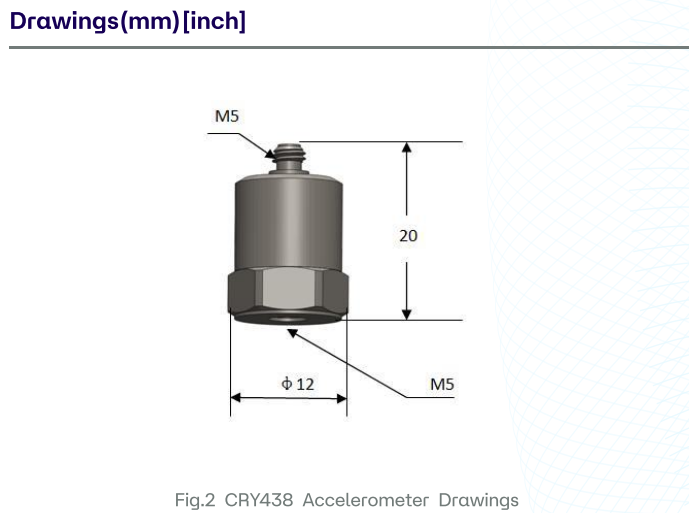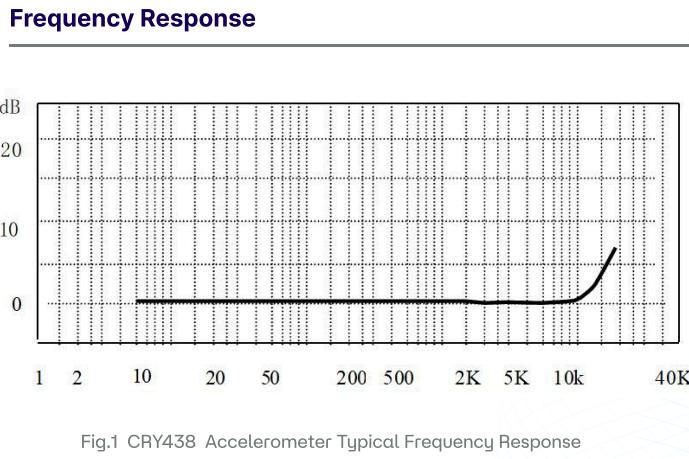

Dimensions	
Height	20.0 mm(0.787)
Diameter	12.0 mm(0.472")

Ordering Information

Optional Accessories	
Cable	M5 to BNC cable / 2m

Related Products	
CRY432	1 Axis, high-g, IEPE accelerometer 5 mV/g, side M5 connector
CRY433	1 Axis, high-sensitivity, IEPE accelerometer, 100 mV/g, top M5 connector
CRY441	1 Axis, high-g charge accelerometer, 5pC/ g, miniature, side M5 connector
CRY446	Triaxial, high-g, IEPE accelerometer, 10 mV/g, miniature, side connector